


0 611 320 703

Issue } 13-11-11
Stand }


Fig./Abb. 1

Modifications reserved
Änderungen vorbehalten
Modifications réservées
Salvo modificaciones


neu/new/nouveau/nuevo




alt/old /ancien/viejo







alt/ancien
old /viejo






neu/nouveau
new /nuevo

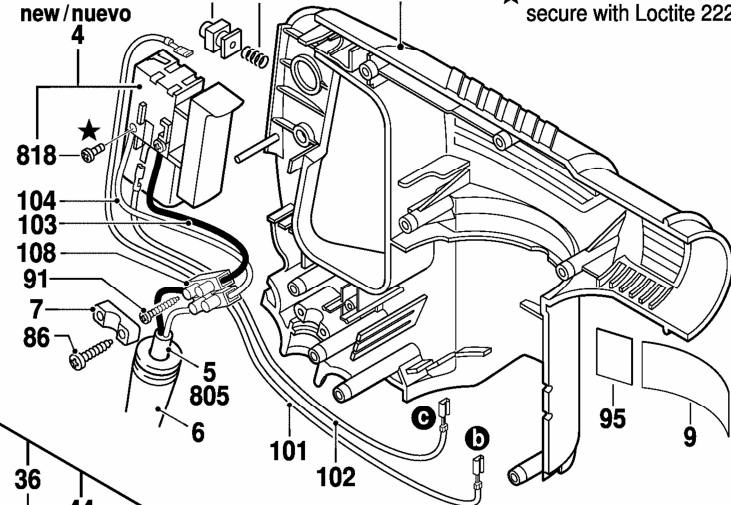


★ mit Loctite 222 sichern
secure with Loctite 222

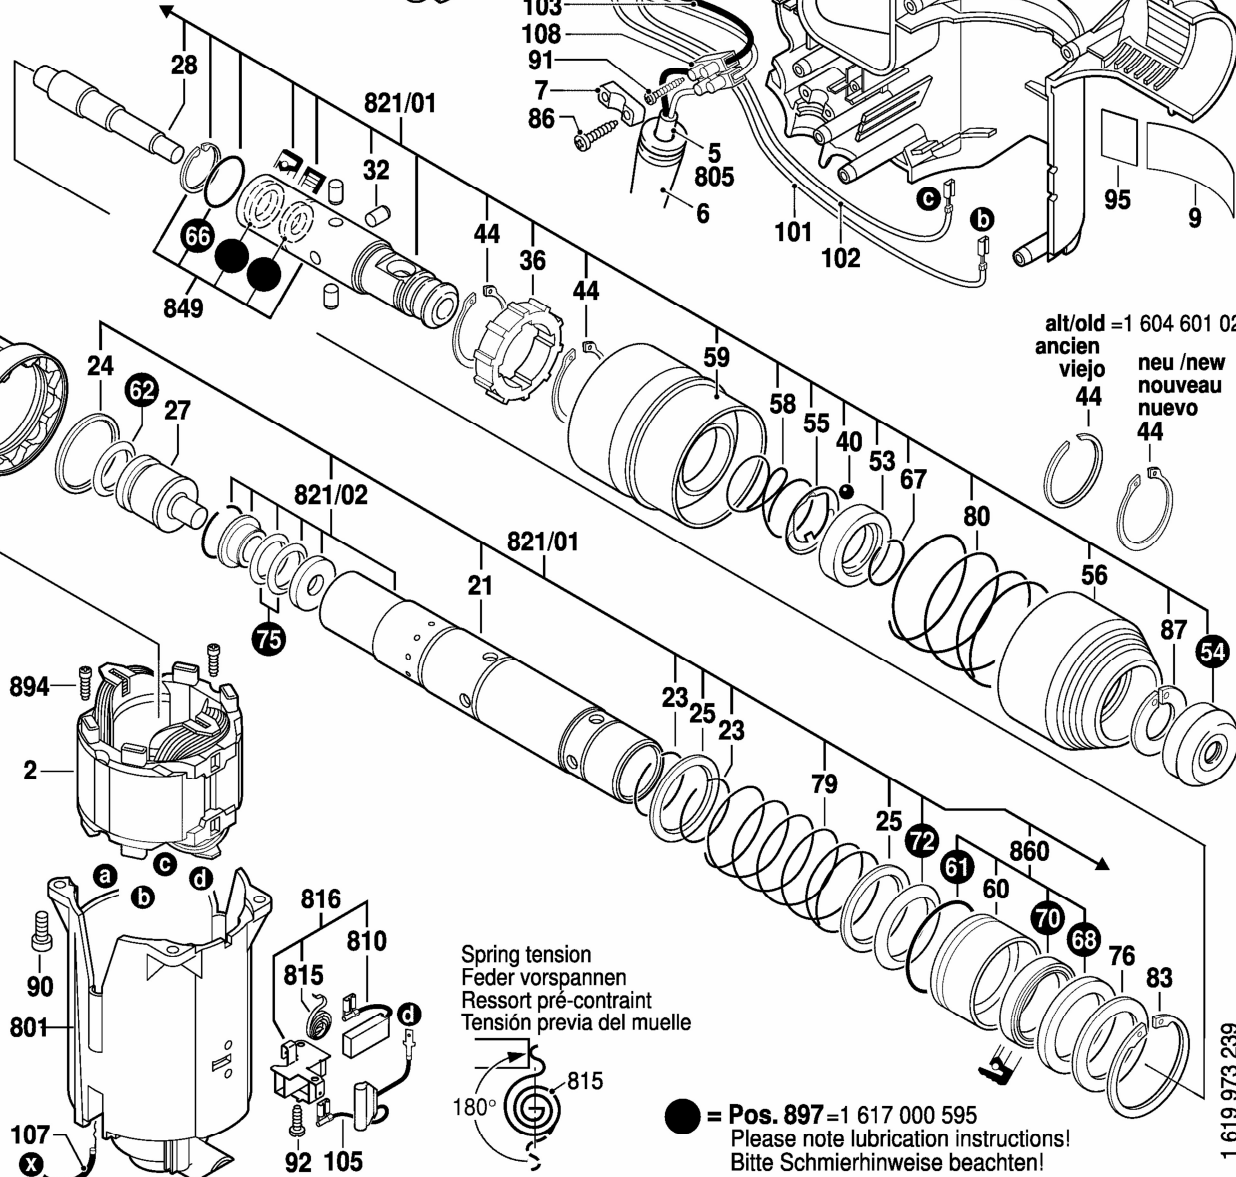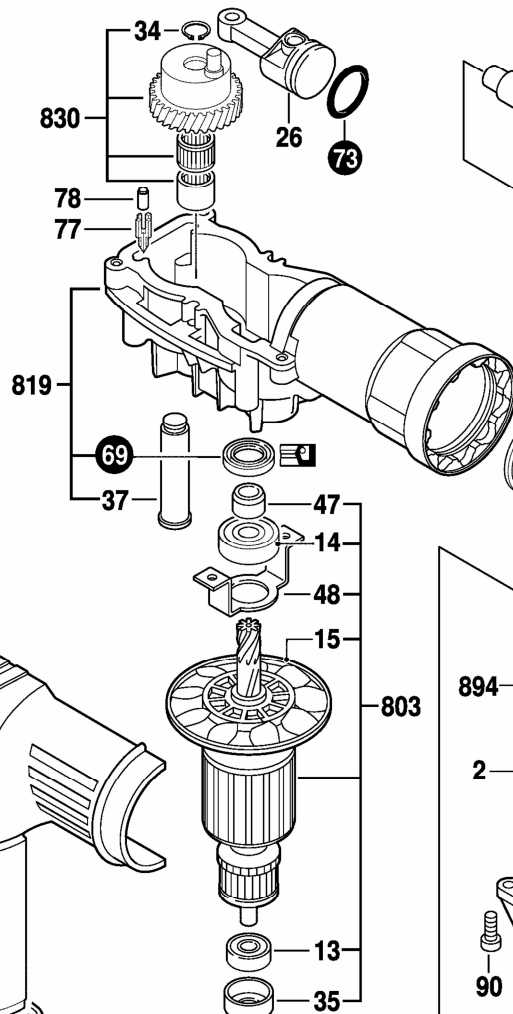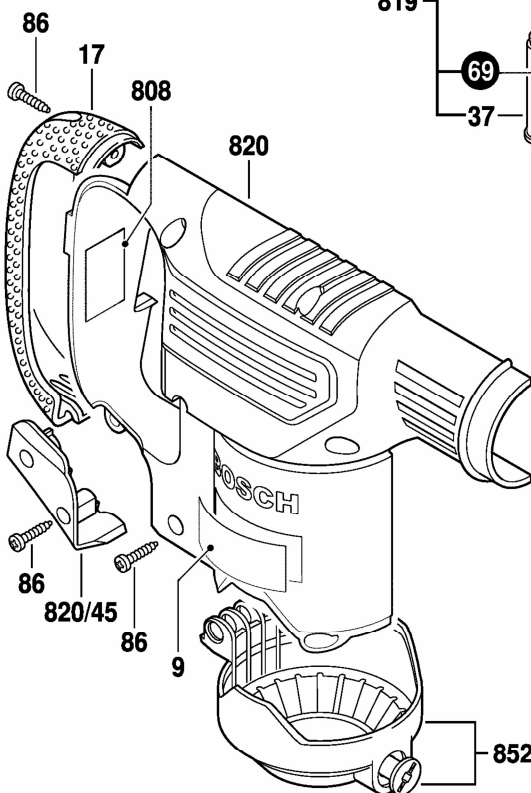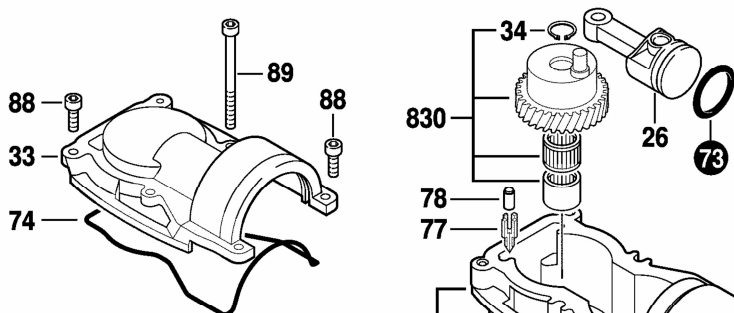

alt/old = 1 604 601 027
ancien /viejo



Spring tension
Feder vorspannen
Ressort pré-contraint
Tensión previa del muelle



● = Pos. 897 = 1 617 000 595
Please note lubrication instructions!
Bitte Schmierhinweise beachten!

1 619 973 239